




FM – TV antenner 88 - 108 MHz

Aerial Oy Medium gain dipole AV1440

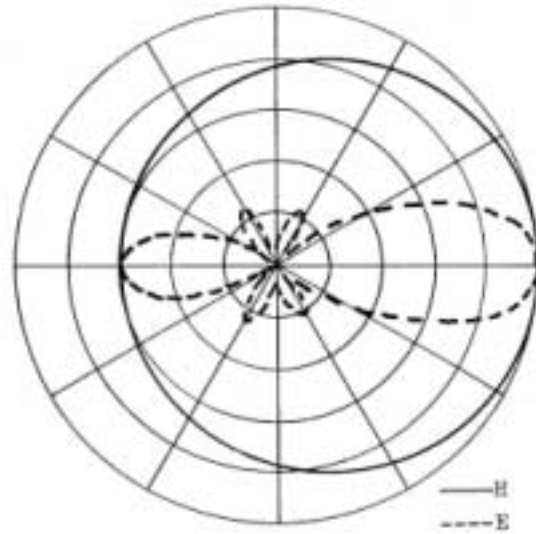

Frequency ranges	95-110 MHz (AV1440-95H) 90-100 MHz (AV1440-95M) 87-98 MHz (AV1440-95L)
Impedance	50 Ω DC grounded
VSWR	1,5 max
Polarisation	Vertical
Gain	6 dBi
E-plane 3 dB beamwidth	-
H-plane 3 db beamwidth	-
Front to back ratio	-
Max continous power	-
RF-connector	N female or 7/16 female
Wind area	0,4 m ²
Dimensions (H x W x D)	4600 x 570 x 60 mm
Weight	14 kg
Mounting diameter	\varnothing 30 – 115 mm pipe
Materials	Aluminium, Plastic
Options	Steel version (AV1440-95-St) Low SVR version High Power versions

V 000603

AB RADIO-MASTER 

Mediavägen 4C
135 48 TYRESÖ

Tel: 08-712 00 60
Fax: 08-742 84 21

E-Mail: info@radiomaster.se
Web: www.radiomaster.se